
Basic Defibrillator Cabinet

(Philips P/N 989803136531)

BATTERY INSTALLATION INSTRUCTIONS

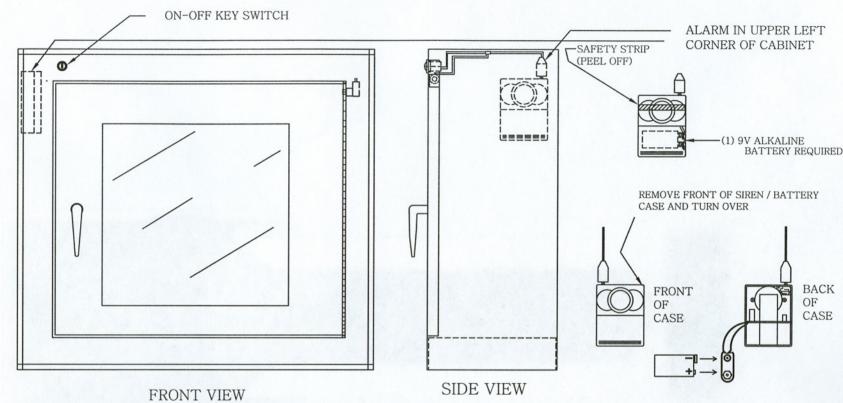

NOTE: Remove shipping tape strip from front of siren / battery case and discard.

- 1. Insert key provided into on-off switch and turn counter-clockwise to 12 oclock position to ensure alarm is disarmed.
- 2. Open cabinet and locate siren / battery case.
- 3. Grip sides of siren / battery case, and pull front portion away from case backing holder. (Backing holder will remain fixed to inside of cabinet.)
- 4. Turn case over and note battery cavity and connectors for (1) 9V alkaline battery. (If replacing a spent battery, disconnect it from connectors and discard appropriately.)
- 5. Connect a fresh 9V alkaline battery to connectors, place battery into case cavity, and snap all back into case backing holder.
- 6. Close door and arm cabinet alarm using keys provided. (Turn key to 3 oclock position to set alarm to the on position.)