Interactive Room Layout Exclusively by Philips Healthcare

Achieva Nova Dual 1.5T


Exam Room View



Click and drag mouse over image to pan around the room



Control Room View

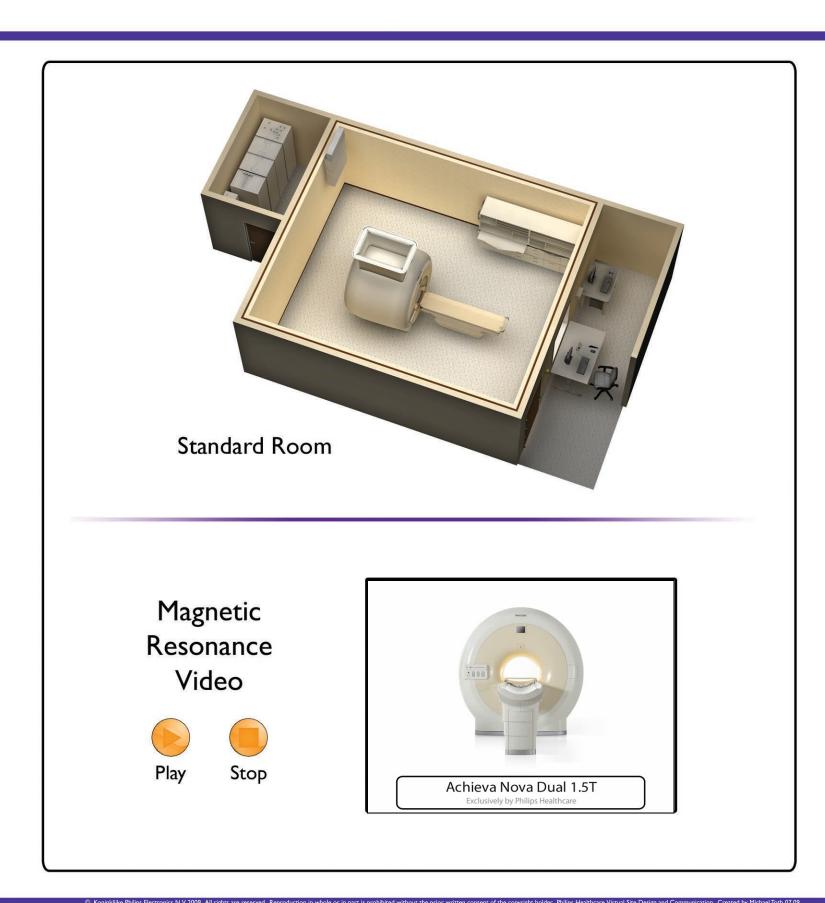






Interactive Room Layout Exclusively by Philips Healthcare


Achieva Nova Dual 1.5T



Equipment Layout

10' - 6"	(3200 mm) Recommended
8' - 6 3/8"	(2600 mm) Minimum
8' - 3"	(2515mm) Required
9' - 10"	(3000 mm) Recommended
9' - 3"	(2820 mm) Minimum*
9' - 10"	(3000 mm) Recommended
7' - 3"	(2200mm) Minimum
8'	12'
	8' - 6 3/8" 8' - 3" 9' - 10" 9' - 3"

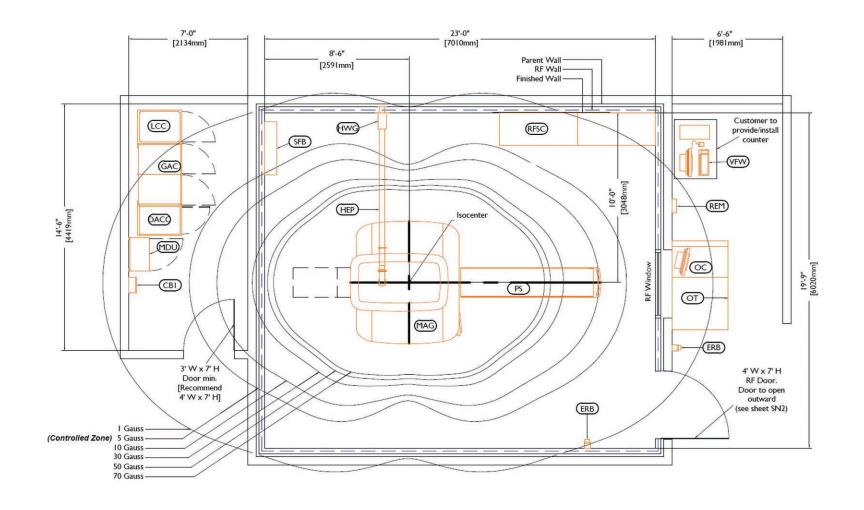

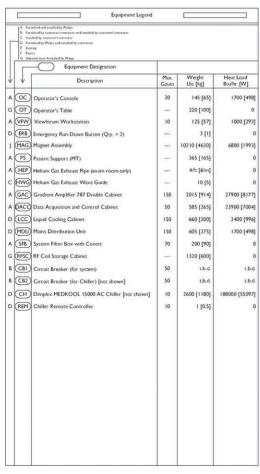

General System Requirements

Environmental

Examination Room:

Operating Temperature: 68° - 75° F (20° - 24° C) Relative Humidity: 40% to 60%, non-condensing Air Conditioning Capacity: 6800 btu/hr (2 kW)

Equipment Room:

Operating Temperature: 59° - 75° F (15° - 24° C)
Relative Humidity: 30% to 70%, non-condensing
Air Conditioning Capacity (standby): 6800 btu/hr (2 kW)
Control Room:

Operating Temperature: 64° - 75° F (18° - 24° C) Relative Humidity: 30% to 70%, non-condensing Air Conditioning Capacity 1700 btu/hr (0.5 kW)

Primary Coolant

Quality: Potable Tap Water

pH: 6.0 - 8.0

CaCO3: < 250 ppm Chlorine: < 200 ppm

Suspended Matter: < 10 mg/L, < 100 micron particle size

Cooling Liquid Inlet: 43° - 59° F (6° - 15° C)

Maximum Flow Allowed: 23.8 GPM (90 L/min)

Maximum Primary Cooling Liquid Pressure: 87 PSI (6 Bar)

Temperature Stability: +/- 3.6° F (+/- 2° C)

Ethylene Glycol Concentration: 35% Recommended Heat dissipation: 23,900 - 136,600 btu/hr (7 - 40 kW)

Controlled Zone

Exclusion zone for persons with cardiac pacemakers or other electrical implants - Magnetic field exceeds 5 Gauss (0.5 mT).

Power

Supply Configuration: 3 phase 3-wire power, and ground Nominal Line Voltage: 208, 240, 480 VAC, 60 Hz

Branch Power Requirement: 80 kVA

Circuit Breaker: 3 pole, 100A (480 VAC)

Remote Service Diagnostics

Medical Imaging equipment to be installed by Philips is equipped with a service diagnostic feature which allows for remote and on-site service diagnostics. To establish this feature, a RJ45 type Ethernet 10/100/1000 Mbit network connector must be installed. Access to customer's network via their remote access server is needed for Remote Service Network (RSN) connectivity. All costs with this feature are the responsibility of the customer.



